


SECTION VIEW = DOME SKYLIGHT (S)

SCALE : 1/2" = 1"

SPECIFICATIONS:


UNIT SHALL BE CONSTRUCTED OF 6063-T5 ALUMINUM EXTRUSION HAVING MINIMUM WALL THICKNESS OF .063. UNIT SHALL BE NEATLY FORMED AND FABRICATED WITH ALL JOINTS AND SEAMS COMPLETELY WELDED BY HELI-ARC PROCESS TO ENSURE MAXIMUM STRENGTH AND WATER TIGHTNESS. ACRYLIC PLASTIC DOME SHALL BE OF A THICKNESS AND CONFIGURATION TO CONFORM WITH U.B.C. REQUIREMENTS AND AAMA SPECIFICATIONS. UNIT SHALL BE SUPPLIED TO JOB READY FOR INSTALLATION.

CALIFORNIA STATE FIRE MARSHAL APPROVAL NO. 4350-054
 SEE I.C.B.O. ES APPROVAL NO. 1998
 CITY OF LOS ANGELES RESEARCH REPORT NO. RR-2708

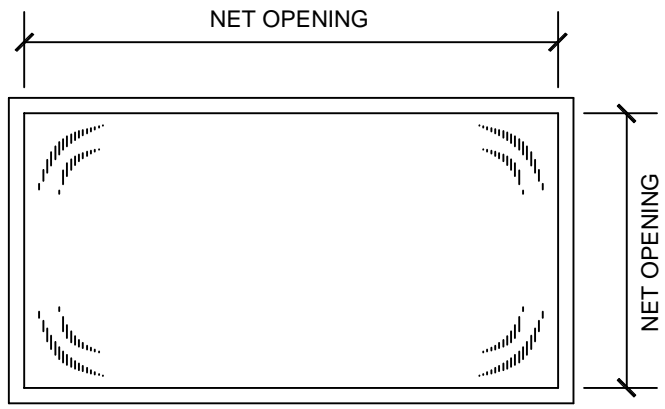

PLAN VIEW

NOT TO SCALE

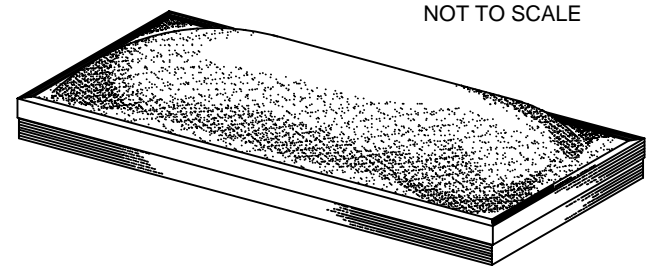

MODEL : S-
 NET OPENING :
 UNITS REQUIRED:
 DOME COLOR :
 FINISH :

 INDUSTRIAL LADDER & SCAFFOLDING <small>8152 BELVEDERE AVE. SACRAMENTO, CA (916)452-0231</small>		By <i>Lane-Aire</i> <small>MANUFACTURING CORP.</small>
JOB		SHEET
ARCH.		OF
CONTR.		DWG. NO.
SUB. CONTR.		S
DRAWN BY	DATE:	REC.